

OUTPUT**Frequency**

50 MHz

Level

+13 dBm ±2 dB into 50 ohms

STABILITY**Aging**1 x 10⁻⁶ per year

after 30 days operating, typical

Phase Noise L(f)

100 Hz -136 dBc

1 KHz -164 dBc

10 KHz -176 dBc

20 KHz -176 dBc

Temperature Stability±2 x 10⁻⁷, 0° to +50°C (Ref +25°C)**MECHANICAL****Dimensions**

1.75 x 2.94 x 1"

Connectors

SMA on side and solder pins on base

Packaging

Solder sealed steel can

POWER REQUIREMENTS**Warm-Up Power**

5 Watts for 5 minutes

Total Power

2.5 Watts at +25°C

Supply Voltage

+15 VDC

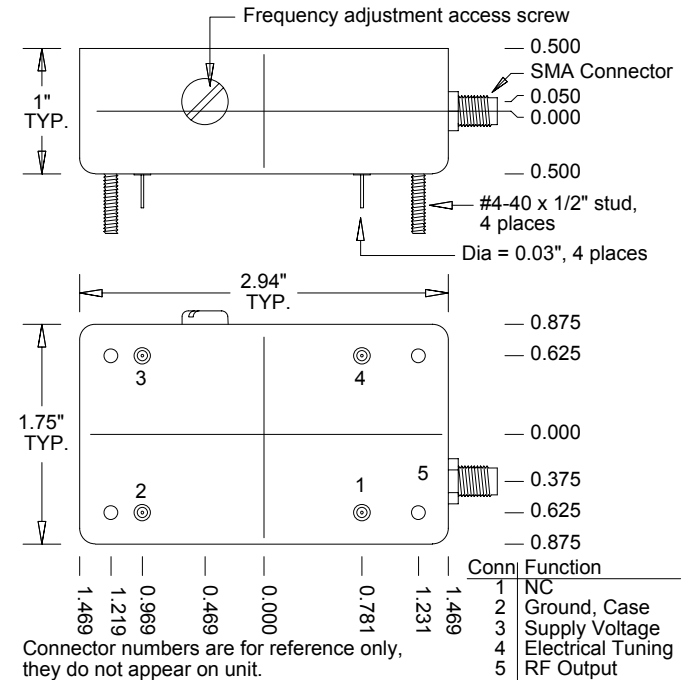
ADJUSTMENT**Mechanical Tuning**±4 x 10⁻⁶**Electrical Tuning**±2 x 10⁻⁷, ±5 VDC

Negative slope

CRYSTAL**Type**

50 MHz SC-cut

REV	DATE	REVISION RECORD	DWN	AUTH
-	03-20-95	Draft	BH	
A	09-17-98	Aging	KW	GP
B	10-29-99	Tuning Hole	KP	BH
C	01-19-00	Correct ET on Drawing	KP	KW
D	02-11-00	Correct Drawing	KP	KW
E	04-04-03	Title, Phase Noise	SS	
F	09-13-04	Temperature Stability	PAC	


Wenzel Associates, Inc.

Austin, Texas

Title:

Premium 50 MHz-SC Ultra Low Noise Crystal Osc.

P/N:

501-04619

Rev:

F

Date:

09-13-04

Drawn:

Ref:

 Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 1