

**OUTPUT****Frequency**

80 MHz

**Level**

+13 dBm ±2 dB into 50 ohms

**STABILITY****Aging**1 x 10<sup>-6</sup> per year

after 30 days operating, typical

**Phase Noise L(f)**

100 Hz -130 dBc

1 KHz -158 dBc

10 KHz -174 dBc

20 KHz -174 dBc

**Temperature Stability**±5 x 10<sup>-7</sup>, 0° to +50°C (Ref +25°C)**MECHANICAL****Dimensions**

1.75 x 2.94 x 1"

**Connectors**

SMA and solder pins on side

**Packaging**

Solder sealed steel can

**POWER REQUIREMENTS****Warm-Up Power**

5 Watts for 5 minutes

**Total Power**

2.5 Watts at +25°C

**Supply Voltage**

+15 VDC



**ADJUSTMENT****Mechanical Tuning**±4 x 10<sup>-6</sup>**Electrical Tuning**±2 x 10<sup>-7</sup>, ±5 VDC

Negative slope

**CRYSTAL****Type**

80 MHz SC-cut

REV	DATE	REVISION RECORD	DWN	AUTH
-	11-14-06	Draft	YR	BH

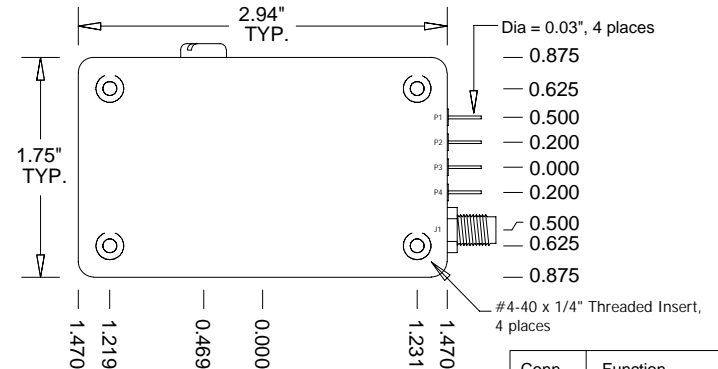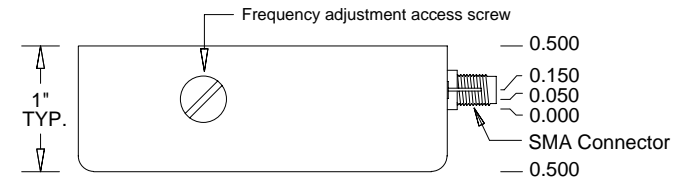

Connector numbers are for reference only, they do not appear on unit.

Conn	Function
J1	RF Output
P1	N/C
P2	Electrical Tuning
P3	Supply Voltage
P4	Case Ground



**Wenzel Associates, Inc.**

Austin, Texas

Title:

**Standard 80 MHz-SC Ultra Low Noise Crystal Osc.**

P/N:

**501-16840**

Rev:

-

Date:

**11-14-06**

Drawn:

Ref:

Tolerances:  
(except as noted)  
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 1